

SimplyStart



Version with panel

To manage the entire plant with only one payment station.

Automated payment system expressly developed for self-service portals.

Particularly suitable to automate also existing manual structures.

It can manage 4 to 6 activation programs.

Safety is ensured by 3 locking points, highly thick (5 mm) steel door and reinforced uprights.

Collected amounts are further protected by an innovative “wireless Anti-theft” system.

It can act as change giver and change coins and/or tokens for auxiliary services (vacuum cleaner, carpet washer, etc.).

It can issue a receipt confirming the transaction or reporting the non execution of the service in case of plant malfunction.

Extremely reliable under any weather condition.

Possibility of installing the Eurokey Plus key system or the SimplyCard micro-chip system aimed at customer loyalty.

Possibility of remote management and control.

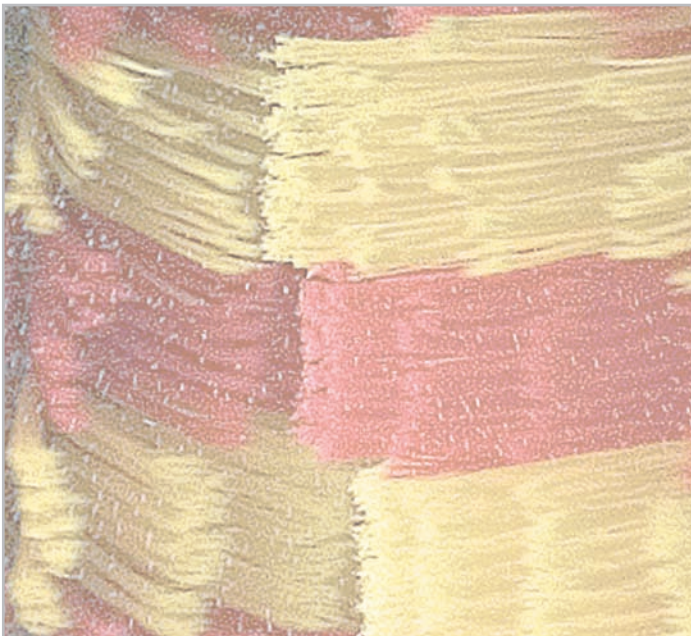




Fig. 1



Fig. 2



Fig. 3



Fig. 4

General characteristics

It is an activator for roller portals allowing to manage the entire plant with only one payment station.

It encompasses all those construction solutions indispensable to ensure max. reliability in case of rain, condensed humidity, hot and cold weather.

Antivandalism keys with IP 67 protection.

Rainproof protection on front openings, on electrical parts and on payment systems.

Steelwork treated for outdoor application.

5mm thick steel door.

High safety locks with three closing points.

Appearance, ergonomics and functionality

The aspect and colour of the front panel that characterize the range of products for outdoor applications provide an aesthetical pleasant effect.

Provided with aeration, antifrost heating and anticondensate system, with thermostat.

It can manage 4 to 6 different wash programs.

The installed key system ensures customer loyalty.

Electronic characteristics

Available in several versions that can be equipped with:

- tropicalized RM5 electronic coin mechanism (Fig. 1);
- NV10 or EBA 03 banknote reader;
- EuroKey Plus cashless system;
- MKIV hopper.


Interfaces

The terminal board to field is easily accessible with open door for connection from and to the plant. The terminal board consists of:

- 4 program version: 4 voltage-free exchange contacts for service activation. 6 program version: 6 voltage-free exchange contacts for service activation in parallel or binary mode (at choice);
- 3 standard optoisolated contacts to receive the washing cycle status (waiting, in progress, car presence, failure, etc.);
- single phase mains supply;
- RS 232C serial interface to pc and peripherals such as modem.

Options

- flange for built-in installation;
- Eurokey Plus cashless system (Fig. 2);
- SimplyCard smart card system (Fig. 3);
- printer to issue receipts;
- column base or base with panel;
- Joiner Plus, the modern remote control and management system using GSM and GPRS technology;
- safety system for change machines: "wireless Anti-theft device" (Fig. 4);
- volumetric sensors (to protect the premises where the machine is installed);
- luminous buttons and light system in withdrawal area;
- customized graphics by quantities.

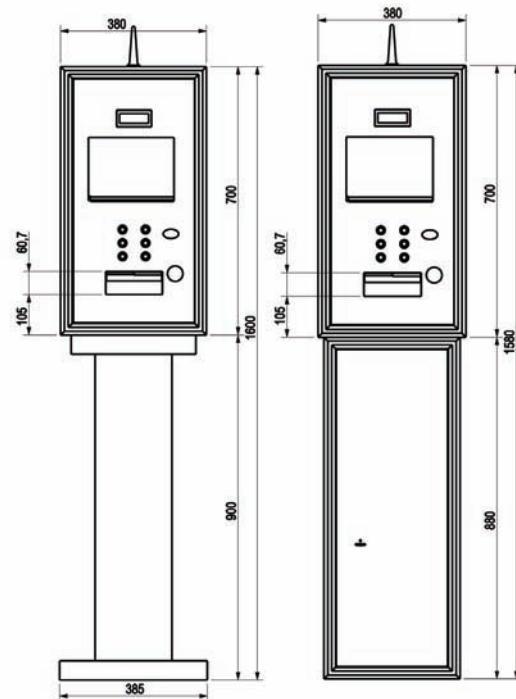

Technical characteristics

	Start	Start on column base	Start on panel
Dimensions (lxhwx) (mm)	380 x 700 x 400	385 x 1600 x 400	380 x 1580 x 400
Weight (Kg)	50	66	72
Power supply	220/230 Vac - 50 Hz		
Input	100 VA max - 25 VA in stand by		
Operating temperature	-15°C ÷ + 50°C - humidity 10% ÷ 90% non condensed		
Protection degree	IP33		

Coin capacity

	0,50 €	1,00 €	2,00 €
1 MKIV	1.520	1.510	1.200

Tools

Programmer
Standard.

